



Dansk Skilte Reklame
Korsvang Centret 9 - 10
DK 5610 Assens
www.danskskiltereklame.dk

UIDeco LED & lighting Panel

www.slinkltd.co.uk



UIDeco LED & lighting Panel



UIDeco LED & lighting Panel

LED 1 tone
LED 2 tone
LED slim
LED ultra slim
LED photo frame
LED 2 sided
LED 8T big frame
LED black board

premium quality



LED 1 TONE

The products of SSLink is the best
which draw human's trust and soul



LED Light Panel Specification A3 (1 TONE)

MODEL NO.	ULP-01A3DS
Light Color	WHITE
Color Temperature	5000K-10000K
Working Voltage (V)	DC12V
Power Consumption	4.32V / 0.24A
Overall Size	329 x 452*20mm
Graphic Size	297 x 420mm
Viewing Size	270 x 393mm
Weight(kg)	2Kg
Led Pitch	10mm
Brightness	led Chip Unit/ 4000mcd
Operation Temp(°c)	-30°c ~ -80°c
Storage Temp (°c)	-40°c ~ -100°c
Adapter	Input : AC170-250/ 50-60Hz
	Output : DC12V/1.2A

Light Box Size

Dimension	Overall Size	Graphic Size	Viewing Size
A4	242 x 329mm	210 x 297mm	183 x 270mm
A3	329 x 452mm	297 x 420mm	270 x 393mm
A2	452 x 626mm	420 x 594mm	393 x 567mm
A1	626 x 873mm	594 x 841mm	567 x 814mm
A0	873 x 1221mm	841x 1189mm	814 x 1162mm
B4	289 x 396mm	257 x 364mm	230 x 337mm
B3	396 x 547mm	364 x 515mm	337 x 488mm
B2	547 x 760mm	515 x 728mm	488 x 701mm
B1	760 x 1062mm	728 x 1030mm	701 x 1003mm
B0	1062 x 1488mm	1030 x 1456mm	1003 x 1429mm

unique design



LED 2 TONE

SSLink actualizes that no other companies ever imitate to produce



LED Light Panel Specification A3 (2 TONE)

MODEL NO.	ULP-02A3DS
Light Color	WHITE
Color Temperature	5000K-10000K
Working Voltage (V)	DC12V
Power Consumption	4.32V / 0.24A
Overall Size	329 x 452 x 20mm
Graphic Size	297 x 420mm
Viewing Size	270 x 393mm
Weight(kg)	2.2Kg
Led Pitch	10mm
Brightness	led Chip Unit/ 4000mcd
Operation Temp(°c)	-30°c ~ -80°c
Storage Temp (°c)	-40°c ~ -100°c
Adapter	Input : AC170~250/ 50-60Hz
	Output : DC12V/1.2A

Light Box Size

Dimension	Overall Size	Graphic Size	Viewing Size
A4	242 x 329mm	210 x 297mm	183 x 270mm
A3	329 x 452mm	297 x 420mm	270 x 393mm
A2	452 x 626mm	420 x 594mm	393 x 567mm
A1	626 x 873mm	594 x 841mm	567 x 814mm
A0	873 x 1221mm	841 x 1189mm	814 x 1162mm
B4	289 x 396mm	257 x 364mm	230 x 337mm
B3	396 x 547mm	364 x 515mm	337 x 488mm
B2	547 x 760mm	515 x 728mm	488 x 701mm
B1	760 x 1062mm	728 x 1030mm	701 x 1003mm
B0	1062 x 1488mm	1030 x 1456mm	1003 x 1429mm

simple slim



SLIM




Useful movement of position of LED panel is the strongest point in products of SSLink. The stands of variety would develop your marketing campaigns

LED Light Panel Specification A4 (SLIM)

MODEL NO.	ULP-03A4DS
Light Color	WHITE
Color Temperature	5000K~10000K
Working Voltage (V)	DC12V
Power Consumption	2.88V / 0.24A
Overall Size	222 x 313 x 18mm
Graphic Size	210 x 297mm
Viewing Size	200 x 287mm
Weight(kg)	1Kg
Led Pitch	10mm
Brightness	led Chip Unit/ 4000mcd
Operation Temp(°c)	-30°c ~ -80°c
Storage Temp (°c)	-40°c ~ -100°c
Adapter	Input : AC170-250/ 50-60Hz
	Output : DC12V/1.2A

Light Box Size

Dimension	Overall Size	Graphic Size	Viewing Size
A4	222 x 313mm	210 x 297mm	200 x 287mm
A3	309 x 436mm	297 x 420mm	287 x 410mm
A2	432 x 610mm	420 x 594mm	410 x 584mm
A1	606 x 857mm	594 x 841mm	584 x 831mm
B4	269 x 380mm	257 x 364mm	247 x 354mm
B3	376 x 531mm	364 x 515mm	354 x 505mm
B2	527 x 744mm	515 x 728mm	505 x 718mm
B1	740 x 1046mm	728 x 1030mm	718 x 1020mm



colorful cute



ULTRA SLIM

LED Panel is available for photo albums




LED Light Panel Specification A5 (ULTRA SLIM IN C#BLACK)

MODEL NO.	ULP-04A5DB
Light Color	WHITE
Color Temperature	5000K-10000K
Working Voltage (V)	DC12V
Power Consumption	1.92V / 0.16A
Overall Size	174*236*14mm
Graphic Size	148*210mm
Viewing Size	138*200mm
Weight(kg)	0.23Kg
Led Pitch	10mm
Brightness	led Chip Unit/ 4000mcd
Operation Temp(°c)	-30°c ~ -80°c
Storage Temp (°c)	-40°c ~ -100°c
Adapter	Input : AC170-250/ 50-60Hz
	Output : DC12V/0.6A

Light Box Size

Dimension	Overall Size	Graphic Size	Viewing Size
Photo Frame	156 x 206mm	130 x 180mm	140 x 170mm
A5	174 x 236mm	148 x 210mm	138 x 200mm
A4	236 x 323mm	210 x 297mm	200 x 287mm
A3	323 x 446mm	297 x 420mm	287 x 410mm



effective


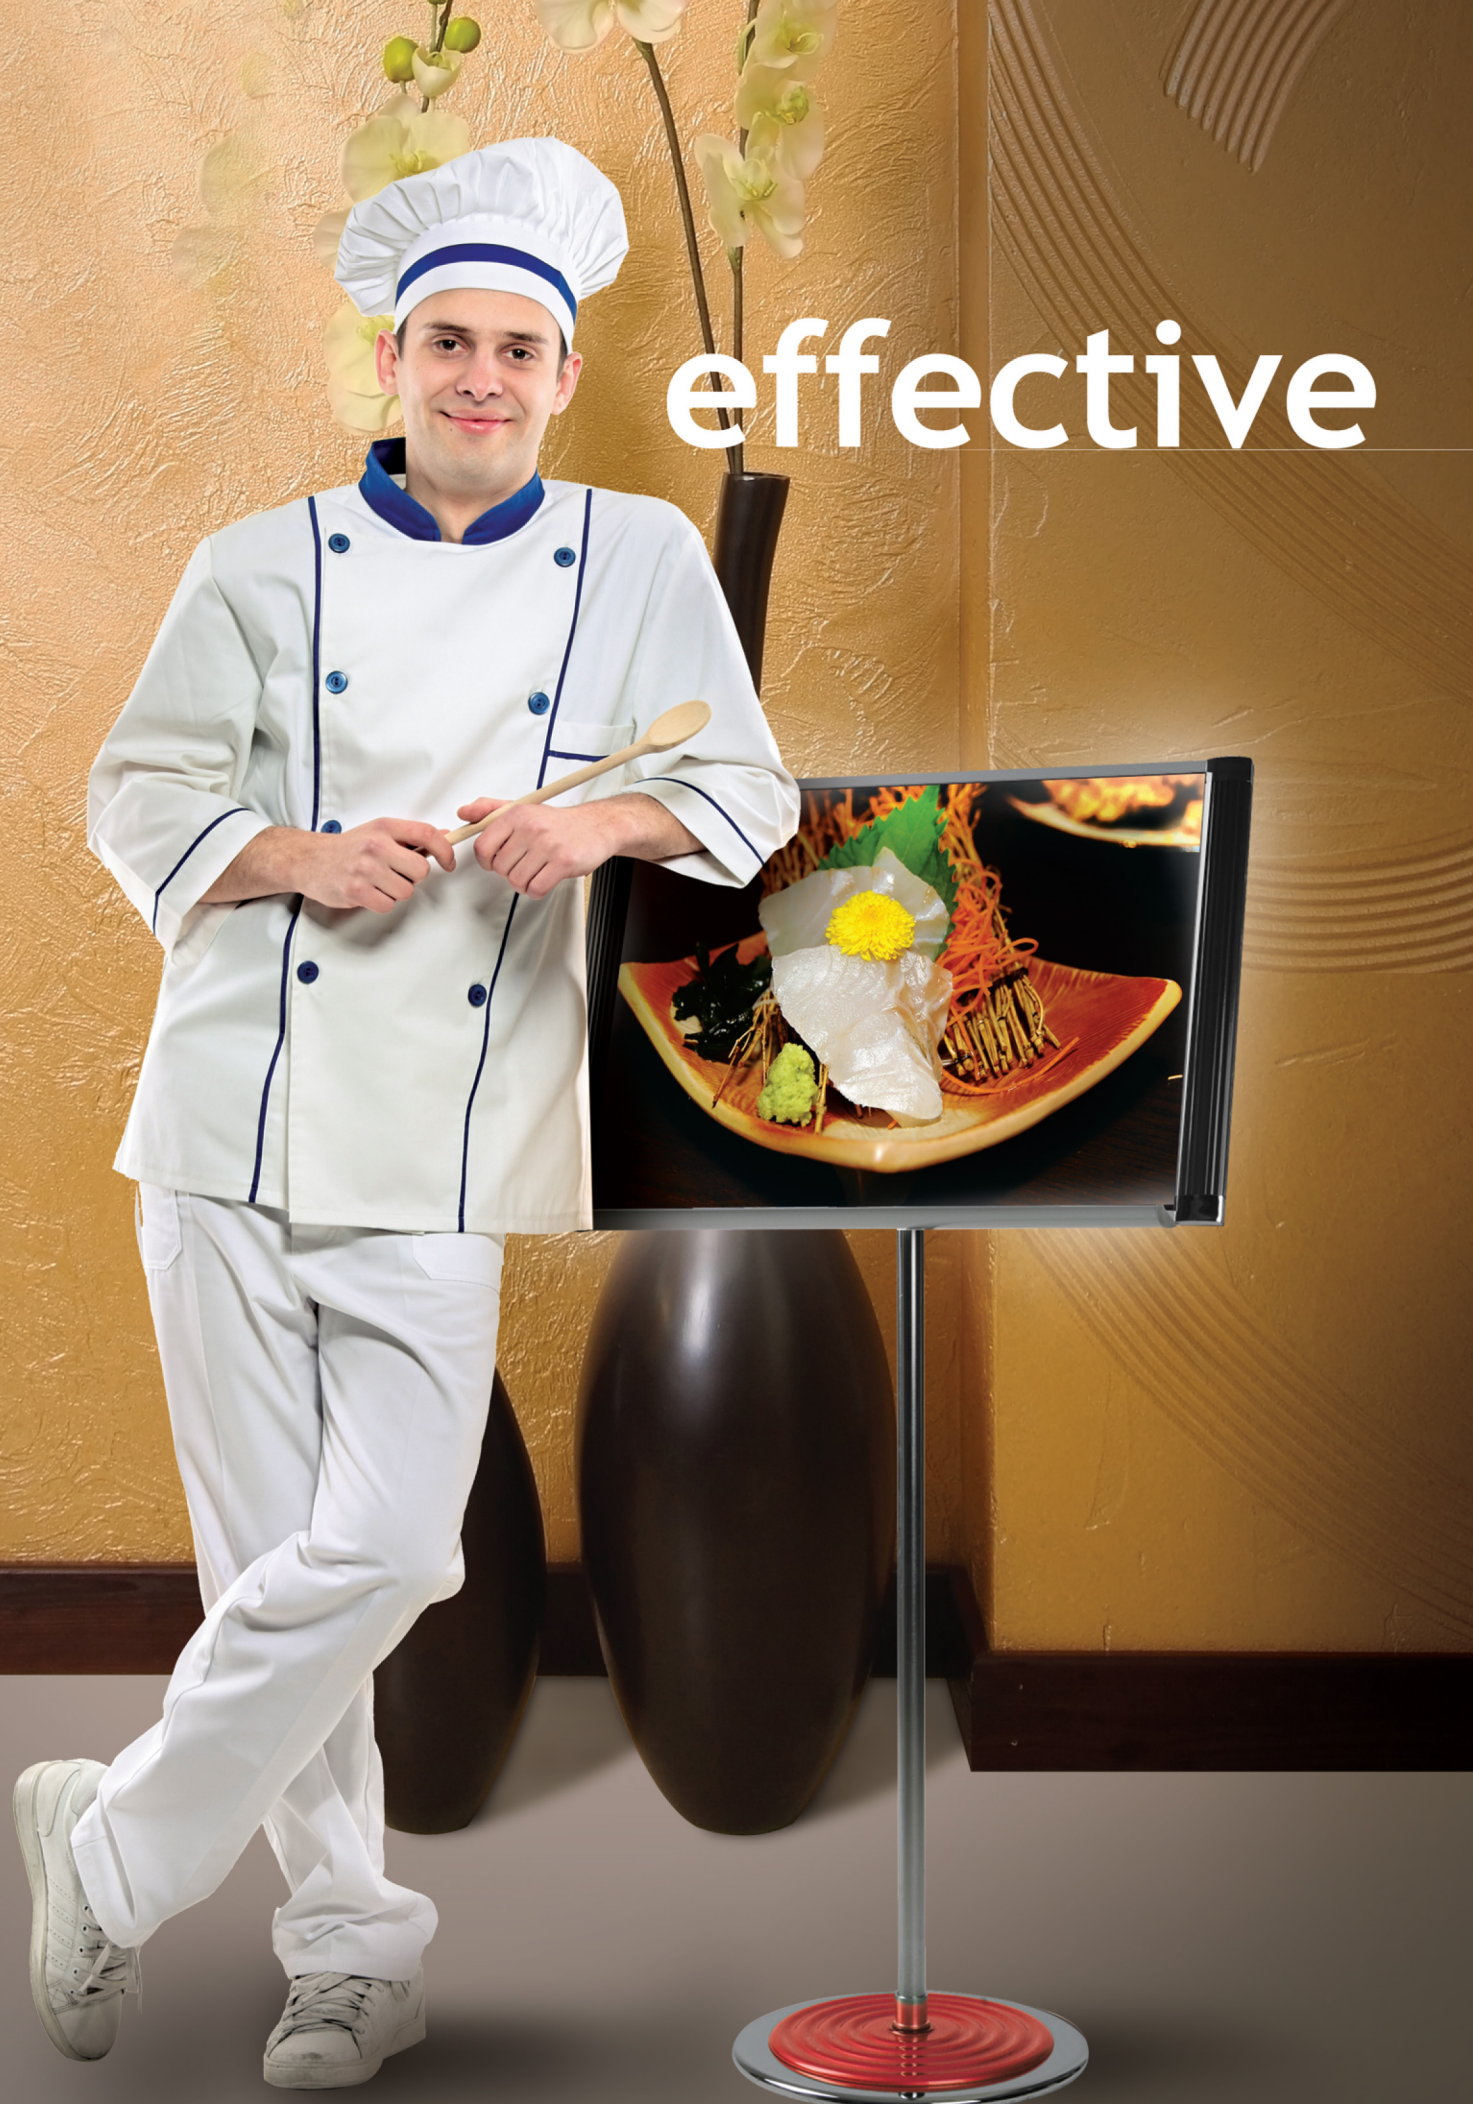


Photo frame is excellent for the space production in order to use for displaying at exhibitions or shows

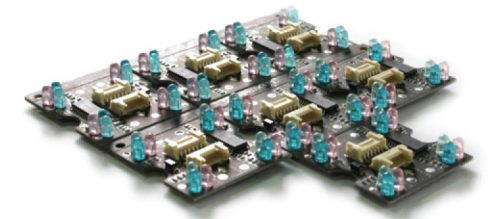

LED Light Panel Photo Panel Specification

Frame

Dimension	Overall Size	Graphic Size	Viewing Size
Thickness / Width	18mm thickness / 14mm width		
Corner Finish	Rounded Corner pieces		
Surface Color	Anodized Silver		
Cover open / close	Flip Open / Close Type		
Mounting method	Easily mountable 2 * mounting clips for portrait or landscape mount		

Light Guide Panel (Acrylic)

Diffusion Pattern	Unique Dot (hornets) by printing Machine, Uniform and very bright Light Guide Panel
Thickness, Material	5.0mm thickness, Clear, pure virgin Acrylic panel
Reflecting sheet	High quality reflecting sheet
Cover plate	Easily mountable 2 * mounting clips for portrait or landscape mount

LED Strip

Type	High Intensity and Reliability, White Flash Type LED
Color Temperature	Around 6500°K ±500°K (Pure White range)
Interval	Interval of LED bulbe are 10mm(42 LED per 420mm)
Width of LED PCB	6mm
Rated Voltage	DC 12Volt typical
Power consumption	15Watts (1.25A) / one meter of LED strip depend on the size of light box
Connecting wire	20AWG, electric wire for interconnecting of both LED strips


Power Supply and others

D.C Power Supply	UL and CE, etc listed, Input : 100~200V / Output : D.C 12V
Connection	Male plug on power supply / Female socket on Light box side
D.C. Jack	5.5mm*2.1mm*9mm, Center plus (+)
Lead wire	Around 6 foot (1.8mm) Cable with female jack on the light panel
Label, Instruction	Indicate all electrical data, carrying / mounting instrution, caution and etc.



2 SIDED

Double sided product is the pride of SLink. You will be satisfied with the quality of our products, prices and designs.

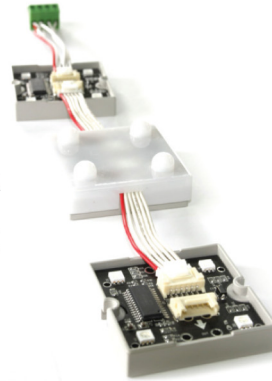

LED Light Panel Specification A3 (2 SIDED)

MODEL NO.	UPL-50A3DS
Light Color	WHITE
Color Temperature	5000K-10000K
Working Voltage (V)	DC12V
Power Consumption	8.64V / 0.72A
Overall Size	353 x 476 x 28mm
Graphic Size	210 x 297mm
Viewing Size	287 x 410mm
Weight(kg)	3Kg
Led Pitch	10mm
Brightness	led Chip Unit/ 4000mcd
Operation Temp(°C)	-30°C ~ -80°C
Storage Temp (°C)	-40°C ~ -100°C
Adapter	Input : AC170~250/ 50~60Hz
	Output : DC12V/1.5A

Light Box Size


Dimension	Overall Size	Graphic Size	Viewing Size
A4	266 x 353mm	210 x 297mm	200 x 287mm
A3	353 x 476mm	297 x 420mm	287 x 410mm
A2	476 x 650mm	420 x 594mm	410 x 584mm
A1	650 x 897mm	594 x 841mm	584 x 831mm
A0	897 x 1245mm	841 x 1189mm	831 x 1179mm
B4	313 x 420mm	257 x 364mm	247 x 354mm
B3	420 x 571mm	364 x 515mm	354 x 505mm
B2	571 x 784mm	515 x 728mm	505 x 718mm
B1	784 x 1086mm	728 x 1030mm	718 x 1020mm
B0	1086 x 1512mm	1030 x 1456mm	1020 x 1446mm

useful



8T BIG FRAME

Double sided product is the pride of SSLink. You will be satisfied with the quality of our products, prices and designs.

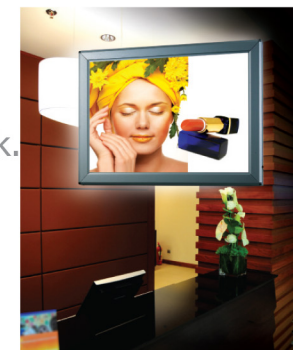

LED Light Panel Specification A2 (8T)

MODEL NO.	ULP-05A2DS
Light Color	WHITE
Color Temperature	5000K-10000K
Working Voltage (V)	DC12V
Power Consumption	13.44V / 1.12A
Overall Size	468 x 642 x 20mm
Graphic Size	420 x 594mm
Viewing Size	408 x 582mm
Weight(kg)	4Kg
Led Pitch	10mm
Brightness	led Chip Unit/ 4000mcd
Operation Temp(°c)	-30°c ~ -80°c
Storage Temp (°c)	-40°c ~ -100°c
Adapter	Input : AC170-250/ 50-60Hz
	Output : DC12V/3.5A

Light Box Size

Dimension	Overall Size	Graphic Size	Viewing Size
A1	642 x 889mm	594 x 841mm	584 x 831mm
A0	889 x 1237mm	841 x 1189mm	831 x 1179mm
B1	776 x 1078mm	728 x 1030mm	718 x 1020mm
B0	1078 x 1504mm	1030 x 1456mm	1020 x 1446mm

multipurpose



BLACK BOARD

The black board, which serves as a multipurpose board, will highly contribute to your businesses' marketing and sales.

LED Light Panel Specification A2 (NEON BOARD / WHITE LIGHT)


MODEL NO.	UNB-01A2FB
Light Color	WHITE
Color Temperature	5000K-10000K
Working Voltage (V)	DC12V
Power Consumption	7V / 0.58A
Overall Size	468 x 642 x 20mm
Viewing Size	408 x 582mm
Weight(kg)	2Kg
Led Pitch	10mm
Brightness	led Chip Unit/ 4000mcd
Operation Temp(°C)	-30°C ~ -80°C
Storage Temp (°C)	-40°C ~ -100°C
Adapter	Input : AC170-250/ 50-60Hz Output : DC12V/1.2A

Light Box Size

Dimension	Overall Size	Graphic Size	Viewing Size
A2	468 x 642mm		408 x 582mm
600 x 900 Size	600 x 900mm		540 x 840mm




LED LINE BAR

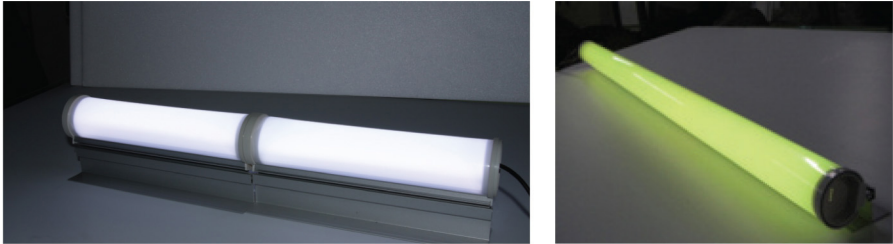

LED Light Line Specipation

Model	ULLB-35FC1000	
Light Color	RGB Full Color / Single Color	
Color Temperature	RGB / W, WW, R, G, B, Y	
Working Voltage(V)	DC12V	
Power consumption	18Watts (1.5A) / one meter of LED strip depend on the size of light Line	
Dimension	100mm-2500mm	
Weight(g)	1.74Kg	
LED Pitch	25mm	
Brightness	(LED One Package Lamp Unit)	5000mcd
Operation Temp(℃)	-30℃ ~ 80℃	
Storage Temp(℃)	-40℃ ~ 100℃	


LED CLIP BAR

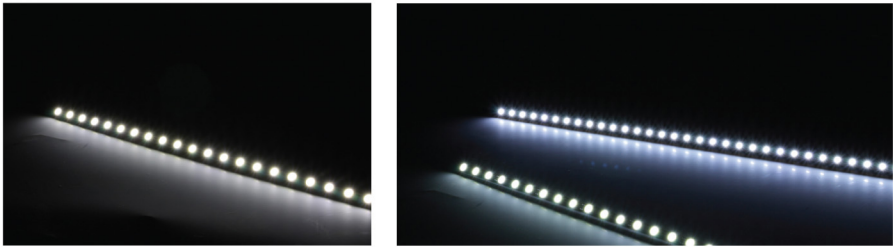

LED Light Line Specipation

Model	ULCB-30F480	
Light Color	RGB Full Color / Single Color	
Color Temperature	RGB / W, WW, R, G, B, Y	
Working Voltage(V)	DC12V	
Power consumption	11.5Watts (0.96A)	
Dimension		
Weight(g)	0.8Kg	
LED Pitch	13mm	
Brightness	(LED One Package Lamp Unit)	5000mcd
Operation Temp(℃)	, -30℃ ~ 80℃	
Storage Temp(℃)	, -40℃ ~ 100℃	

LED PANORAMA MODULE

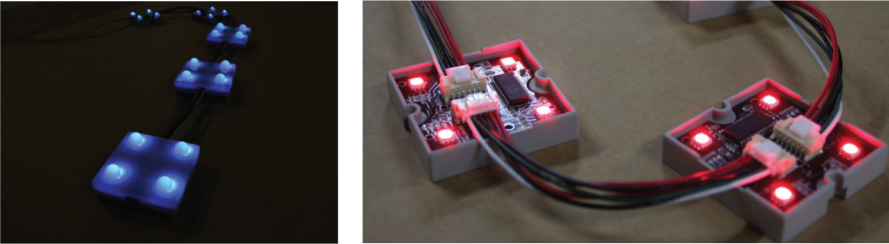

Dansk Skilte Reklame
Korsvang Centret 9 - 10
DK 5610 Assens
www.danskskiltereklame.dk

LED CARVING SIGN BAR



LED Light Line Specipation

Model	UAS-30F480	
Light Color	RGB Full Color / Single Color	
Color Temperature	RGB / W, WW, R, G, B, Y	
Working Voltage(V)	DC12V	
Power consumption	11.5Watts (0.96A)	
Dimension		
Weight(g)	1.2Kg	
LED Pitch	16mm	
Brightness	(LED One Package Lamp Unit)	5000mcd
Operation Temp(℃)	-30℃ ~ 80℃	
Storage Temp(℃)	-40℃ ~ 100℃	